



- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Cylindrical**
- **Knob**

Features

| | |
|---------------------------------|---|
| Access Control: | Mechanical pushbutton lock eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress. |
| No Battery: | Fully mechanical lock eliminates the material and labor expense of battery replacements |
| Locking Device: | Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors |
| Number of Codes: | Single access code—one easy-to-manage code for all users |
| Programming: | Lock is easily programmed via keypad without removing lock from the door |
| Handing: | Factory-handed for left-hand doors; easily field reversible |
| Key Override (Optional): | Small format interchangeable cores, large format removable cores |
| Operation Modes: | <p><u>Pushbutton Access</u></p> <p><u>Passage</u> (select models)—allows access without using the lock entry code. Feature activated from the inside with a thumbturn or key (included with all passage feature models).</p> <p><u>Lockout</u> (select models)—disables the lock from the inside so that the entry code cannot be used to gain access. Access is permitted using the key override only.</p> |
| Economical: | A cost effective access control solution |

Mechanical Features

| | |
|-----------------------------------|---|
| Construction: | Heavy-duty cylindrical lock housing with cast front housing; unified trim plate; cast knobs |
| Numeric Keypad: | Vandal resistant, solid metal pushbuttons |
| Handing: | Factory-handed for left-hand doors; easily field reversible |
| Standard Finishes: | Satin Chrome 26D (626), Antique Brass 05 (609) |
| Optional Finishes: | Bright Brass 03 (605), Bright Chrome 026 (625) |
| Backset: | 2¾" (70 mm), 2⅞" (60 mm) |
| Latch: | ½" (13 mm) throw latch, ¾" (19 mm) throw latch (optional) |
| Minimum Stile Recommended: | 5" (127 mm) |
| Weight: | 7.25 lbs. (3.3 kg) |
| Strike: | Standard strike plate; ASA strike plate |

Key Override

| | |
|-------------------------------|--|
| Interchangeable Cores: | Small format—Best and equivalents (6 or 7-pin length); core not included |
| Removable Cores: | Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent; core not included |

Installation

| | |
|--------------------------------|--|
| Door Preparation: | Easily installs on wood or metal doors. ASA 161 door preparation with additional through bore holes required. |
| Door Thickness: | 1 ³ / ₈ " (35 mm) to 2 ¹ / ₄ " (57 mm)—Pre-assembled to accommodate 1 ⁵ / ₈ " (41 mm) to 2" (51 mm) |
| Items Supplied Include: | Lock assembly, installation manual, full-scale template, combination change plug and access key, and required installation hardware |


Certification and Testing

| | |
|---------------------|---|
| Durability: | Weather resistant |
| Fire Rating: | 3-hour UL/ULC fire rating for "A" labeled doors |


Warranty

| | |
|------------------|-----------------|
| Warranty: | 3-year warranty |
|------------------|-----------------|

Cylindrical

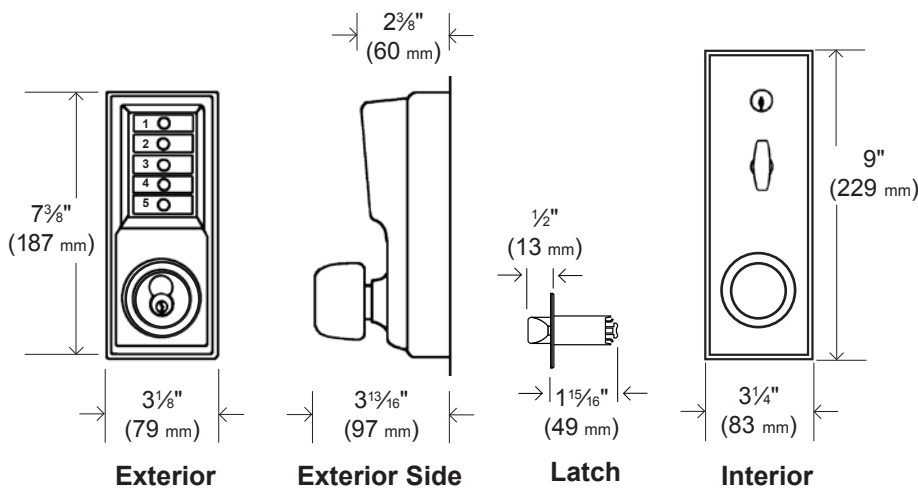


Model 101x




- Combination Entry
- Interior Combination Change

Model 102x




- Combination Entry
- Key Override (not supplied)
- Interior Combination Change

Model 103x




- Combination Entry
- Interior Combination Change
- Passage

Model 104x



- Combination Entry
- Key Override (not supplied)
- Passage
- Interior Combination Change

Lockout Models



- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Lockout from Inside Trim

1000 Series