



- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Exit Trim**
- **Thumbturn**

## Features

<b>Access Control:</b>	Mechanical pushbutton lock eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress at all times by interior Exit Device (not supplied).
<b>No Battery:</b>	Fully mechanical lock eliminates the material and labor expense of battery replacements
<b>Locking Device Options:</b>	<u>Rim Exit Device:</u> Compatible with most leading brands of Exit Devices (Exit Device and mounting hardware not included)
<b>Exit Device Compatibility:</b>	<div style="background-color: #e0e0e0; padding: 5px; text-align: center;"> <p><b>For the most accurate listing of compatible Exit Devices, visit <a href="http://kaba.to/Simplex2015">http://kaba.to/Simplex2015</a></b></p> </div> <p>American Device 6300 Series, 6303 Series  Corbin 21, 22, 25, 26NT, 27K, 29, 29-1/4, 29M2, 29-1/2M2, 29NTM2, 29D20, LA29, 39, 39EL, 39LLD, 390, LA39  Detex Advantex Series 10, 20, 21, 40, 50, 51  Dorex 8500R/8500F  Dorex 9500R/9500FR  Magno Krom LHR only: 500-4, 550-4, 650-4, 1500-4, 1550-4, 1650-4; RHR only: 600-3  Monarch 18RBA, 18RP, 18VP, F18RBA, F18RP, F18VP, FXXRBA, FXXRP, FXXVP, XXRBA, XXRP, XXVP  Precision Hardware FL-D103; RHRB only 810-H; RH or LH: 103, R103, D203, H-203, 1103, D1203, H1203</p> <p>Russwin 365, 3651/4, LT365, 370, 372, LA372, 375, LT375, 377, 382, 384, 385, 388, 572, 572EL, 572ELD, U572, LA572  Sargent 2813, 2804, 6804, 12-6804, 9804RHRB, 12-9804LHRB, 9898E, 9898K  Von Duprin 22 Rim, 22 Rim-F, 88 Rim, 88 Rim-F, 98 Rim, 98 Rim-F, 99 Rim, 99 Rim-F; 2227, 2227-F, 9827, 9827-F, 9847, 9847-F, 9927-F, 9947-F  Yale 1500 Series, 7000 Series</p>
	<ul style="list-style-type: none"> <li>• <b>Cannot be used with surface-mounted Exit Devices with counterclockwise rotating hubs, thumb-operated Mortise design Exit Devices, or vertical rod Exit Devices</b></li> </ul>
	<div style="background-color: #e0e0e0; padding: 5px; text-align: center;"> <p><b>ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba's knowledge</b></p> </div>
<b>Number of Codes:</b>	Single access code—one easy-to-manage code for all users
<b>Programming:</b>	Lock is easily programmed via keypad without removing lock from the door
<b>Handing:</b>	For non-handed or clockwise-rotating (adjustable up to 90°) Exit Device hubs only
<b>Operation Modes:</b>	<u>Pushbutton Access</u> Exit Device may be "dogged" without affecting the 2015
<b>Economical:</b>	A cost effective access control solution
<b>Tailpiece:</b>	2¾" (70 mm) adjustable tailpiece for Exit Device operation from outside; Optional 5" (127 mm) tailpiece available (sold separately; part # 74773-000-001)
<b>Exit Device Hub Rotation:</b>	Adjustable up to 90° clockwise for right hand (adjustable cam)

**Mechanical Features**

<b>Construction:</b>	Heavy-duty, cast front housing
<b>Numeric Keypad:</b>	Vandal resistant, solid metal pushbuttons
<b>Handing:</b>	For non-handed or clockwise-rotating (adjustable up to 90°) Exit Device hubs only
<b>Finish:</b>	Satin Chrome 26D (626)
<b>Control:</b>	6-pin tumbler cylinder keys for combination change access; can be keyed alike or master keyed, specify at time of order
<b>Latch:</b>	Not supplied (see compatibility list on previous page)
<b>Strike:</b>	Not supplied (supplied with Exit Device)
<b>Minimum Stile Recommended:</b>	3 1/8" (79 mm)
<b>Weight:</b>	3.5 lbs. (1.6 kg)

**Installation**

<b>Door Preparation:</b>	Exit Device preparation may require recessed through bolting; 2015 installation is based on centerline of mating Exit Device hub
<b>Door Thickness:</b>	1 3/8" (35 mm) to 2 1/2" (64 mm); optional 5" (127 mm) tailpiece (purchased separately)
<b>Items Supplied Include:</b>	Installation manual, full-scale template, combination change keys, and required lock installation hardware only

**Certification and Testing**

<b>Durability:</b>	Weather resistant
--------------------	-------------------

**Warranty**

<b>Warranty:</b>	1-year warranty
------------------	-----------------

**Exit Trim**

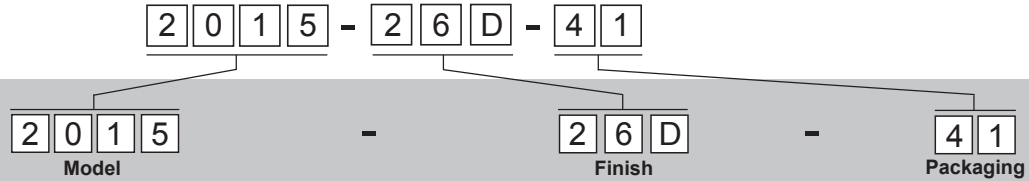
**Exterior** dimensions: 8 5/8" (219 mm) height, 3 1/8" (79 mm) width.

**Exterior Side** dimensions: 2" (51 mm) depth, 2 3/4" (70 mm) height.

**Interior** (not supplied)

**2015**

- Combination Entry
- Egress with Exit Device (not supplied)
- Compatible with Many Rim Mounted Exit Devices
- Exterior Combination Change (only)

**Example****Build the model number with the desired options**

Base Model	Description	Base Price
201526D41	Combination Entry with Thumbturn Style Knob <sup>+</sup> (clockwise rotation only)	\$397.50

**Notes**

Key override orders will consist of all locks on the order being keyed alike, unless there is a specific key cut called out or the locks on the order are requested to be keyed differently

**+ Exit Device Compatibility**

**For the most accurate listing of compatible Exit Devices, visit <http://kaba.toSimplex2015>**

American Device 6300 Series, 6303 Series

Corbin 21, 22, 25, 26NT, 27K, 29, 29-1/4, 29M2, 29-1/2M2, 29NTM2, 29D20, LA29, 39, 39EL, 39LLD, 390, LA39

Detex Advantex Series 10, 20, 21, 40, 50, 51

Dorex 8500R/8500F

Dorex 9500R/9500FR

Magno Krom LHR only: 500-4, 550-4, 650-4, 1500-4, 1550-4, 1650-4; RHR only: 600-3

Monarch 18RBA, 18RP, 18VP, F18RBA, F18RP, F18VP, FXXRBA, FXXRP, FXXVP, XXRBA, XXRP, XXVP

Precision Hardware FL-D103; RHRB only 810-H; RH or LH: 103, R103, D203, H-203, 1103, D1203, H1203

Ruswin 365, 3651/4, LT365, 370, 372, LA372, 375, LT375, 377, 382, 384, 385, 388, 572, 572EL, 572ELD, U572, LA572

Sargent 2813, 2804, 6804, 12-6804, 9804RHRB, 12-9804LHRB, 9898E, 9898K

Von Duprin 22 Rim, 22 Rim-F, 88 Rim, 88 Rim-F, 98 Rim, 98 Rim-F, 99 Rim, 99 Rim-F; 2227, 2227-F, 9827, 9827-F, 9847, 9847-F, 9927-F, 9947-F; Yale 1500 Series, 7000 Series

- Cannot be used with surface-mounted Exit Devices with counterclockwise rotating hubs, thumb-operated Mortise design Exit Devices, or vertical rod Exit Devices**

**ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba's knowledge**

**Exit Device not included (sold separately)**