



- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Cylindrical**
- **Lever**

Features

Access Control:	Mechanical pushbutton lock eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device:	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
Number of Codes:	Single access code—one easy-to-manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory-handed; not field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	<u>Pushbutton Access</u> <u>Passage</u> (select models)—allows access without using the lock entry code. Feature activated from the inside with a thumbturn or key (included with all passage feature models). <u>Privacy</u> (select models)—disables the lock from the inside so that the entry code cannot be used to gain access. Access is permitted using the key override only when in this mode.
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cylindrical lock housing with cast front housing, unified trim plate, and fixed ADA-compliant levers
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory-handed; not field reversible
Standard Finishes:	Satin Chrome 26D (626), Antique Brass 05 (609)
Optional Finishes:	Bright Brass 03 (605), Bright Chrome 026 (625)
Backset:	2 ³ / ₄ " (70 mm), 2 ³ / ₈ " (60 mm)
Latch:	1/2" (13 mm) throw latch, 3/4" (19 mm) throw latch (optional)
Minimum Stile Recommended:	5" (127 mm)
Weight:	8.25 lbs. (3.7 kg)
Strike:	Standard strike plate; ASA strike plate

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length); core not included
Removable Cores:	Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length); Corbin Russwin (6-pin length); Schlage, and Sargent; core not included

Installation

Door Preparation:	Easily installs on wood or metal doors. ASA 161 door preparation with additional through holes.
Door Thickness:	1 ³ / ₈ " (35 mm) to 2 ¹ / ₄ " (57 mm)—Pre-assembled to accommodate 1 ⁵ / ₈ " (41 mm) to 2" (51 mm) doors
Items Supplied Include:	Lock assembly, installation manual, full-scale template, combination change plug and access key, and required installation hardware

Certification and Testing

Accessibility Standard:	Americans with Disabilities Act (ADA); fixed ADA-compliant levers
Durability:	D.O.D. Compliant 5220.22M for supplemental access control; weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors


Warranty

Warranty:	3-year warranty
------------------	-----------------

Cylindrical

Door handing must be specified when ordering.

<p>Exterior</p> <p>7³/₈" (187 mm)</p> <p>3¹/₈" (79 mm)</p>	<p>Exterior Side</p> <p>2³/₈" (60 mm)</p> <p>3¹³/₁₆" (97 mm)</p>	<p>Latch</p> <p>1/2" (13 mm)</p> <p>1¹⁵/₁₆" (49 mm)</p>	<p>Interior</p> <p>9" (229 mm)</p> <p>3¹/₄" (83 mm)</p>	<p>Model L101x</p> <ul style="list-style-type: none"> • Combination Entry • Interior Combination Change 	<p>Model L102x</p> <ul style="list-style-type: none"> • Combination Entry • Key Override (not supplied) • Interior Combination Change
				<p>Model L103x</p> <ul style="list-style-type: none"> • Combination Entry • Interior Combination Change • Passage 	<p>Model L104x</p> <ul style="list-style-type: none"> • Combination Entry • Key Override (not supplied) • Interior Combination Change • Passage
				<p>Model L1076</p> <ul style="list-style-type: none"> • Combination Entry • Key Override (not supplied) • Interior Combination Change • Privacy (lockout) available on key override models only 	

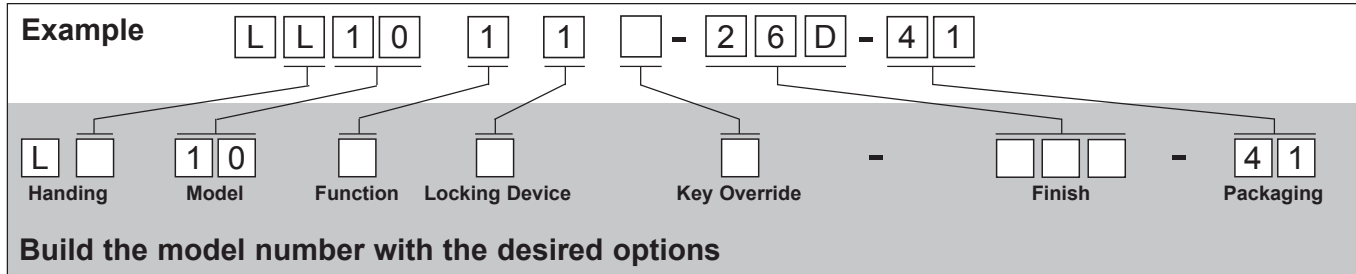

Base Model	Description	Base Price
LL101126D41	Cylindrical Lock with Lever, No Key Override	\$540.50

Choose One Option from Each Category

Handing Options	Description	Price
L	Left Hand or Left Hand Reverse	No Charge
R	Right Hand or Right Hand Reverse	No Charge

Function Options	Description	Price
1	Cylindrical Lock, Combination Entry Only	No Charge
2	Cylindrical Lock, Combination Entry, and Key Override	Add \$70.00
3	Cylindrical Lock, Combination Entry, and Passage	Add \$50.00
4	Cylindrical Lock, Combination Entry, Key Override, and Passage	Add \$120.00
7	Cylindrical Lock, Combination Entry, Key Override, and Privacy (lockout) (requires "6" Locking Device Option) 1¾" (44 mm) door thickness <u>only</u>	Add \$90.00

Locking Device Options	Description	Price
1	Cylindrical ½" (13 mm) throw latch, floating face plate 2¾" (70 mm) backset (UL listed)	No Charge
2	Cylindrical ½" (13 mm) throw latch, floating face plate 2⅝" (60 mm) backset (UL listed)	No Charge
5	Cylindrical ¾" (19 mm) throw latch, beveled face plate 2¾" (70 mm) backset (UL listed)	No Charge
6	Cylindrical ¾" (19 mm) throw latch, beveled face plate—(for 1076 only) 2¾" (70 mm) backset (UL listed) 1¾" (44 mm) door thickness <u>only</u>	No Charge

Key Override Options	Description	Price
B	I/C Best and Equivalents (6 or 7-pin length); core not included	No Charge
C	R/C Corbin Russwin (6-pin length); core not included	No Charge
M*	R/C Medeco/ASSA/Yale/Abloy (5 or 6-pin length); core not included	No Charge
R	R/C Sargent; core not included	No Charge
S	R/C Schlage; core not included	No Charge

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware

Notes

* **Medeco/ASSA/Yale/Abloy (5 and 6-pin length)**

5 and 6-pin Medeco/ASSA/Abloy cylinders require a special knob spacer (included in package)

Privacy option is available on key override models only. Fits 1¾" (44 mm) doors only